

Purmelt HKP 26




PUR Hotmelt Adhesive for Edgebanding Straightline

Characteristics

- Reactive hotmelt adhesive system based on polyurethane
- Fast setting
- High initial strength
- Chemical cross-linking within few days
- Forms an insoluble, thermoset film
- Very high heat resistance (>150°C/>302°F) and cold flexibility
- Excellent water resistance
- Produces tight joints

Fields of Applications

- Edgebanding in HolzHer cartridge equipment as from federates of 10m/min.
- Edgebanding material: solid wood, veneer, melamine, polyester, HPL*, PVC*, ABS*, PP*
**Suitability depends on the individual characteristics of the Edgebanding material and how it is primed. In case of thick Edgebanding pre-tests should be carried out for suitability.*

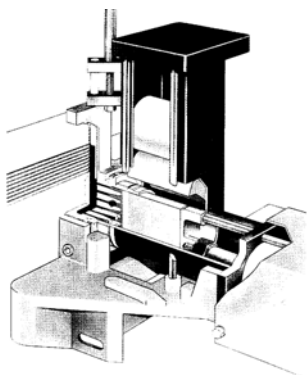

TECHNICAL DATA:

Viscosity (Brookfield) @ 200°C	: approx. 25,000 mPas
Softening Point	: approx. 100°C
Heat Resistance	: >150°C
Curing time to final strength	: 2 – 5 days

INSTRUCTIONS FOR USE

Recommended working temperature: : approx. 150°C

Since the product will cure when it is exposed to moisture, storage and application must be done under dry conditions. For this reason, the product is delivered in airtight containers.

CLEANING

Flushing the system with Purmelt Cleaner 2 periodically or prior to changing to an alternative reactive hotmelt will reduce internal build-up of adhesive residue. Application devices such as wheels and rolls that expose reactive adhesive to the air should be thoroughly flushed at the end of a production run or at anytime when there is built-up and gelling. Cured PUR hotmelt can only be removed by softening with an appropriate solvent such as N-ethyl-pyrrolidone (NEP) and then using a non-abrasive scraper. Strictly follow the instructions of the machine manufacturer.

DÖLKEN
WOODTAPE

A SURTECO COMPANY



Purmelt HKP 26

PUR Hotmelt Adhesive for Edgebanding Straightline

DELIVERY FORM

Cartridges

STORAGE

Shelve life of at least 2 years if stored in a cool and dry place.

LABELLING

The safety datasheet should be respected!

SAFETY

The product contains diphenylmethanediisocyanate. Even if the product is applied within the range of the recommended working temperature, the diisocyanate has a detectable vapour pressure. When the recommended working temperature is considerably exceeded, hazardous decomposition products may be formed in the application unit. Therefore, measures to draw off the vapours need to be taken, e.g. through the provision of extraction equipment. In case of skin contact with the hotmelt, do not try to remove the adhesive from the skin by force. Consult a doctor. Observe the material safety data sheet.

The information provided herein, especially recommendations for the usage and applications of our products, is based on our knowledge and experience. Due to different material used as well as to varying working conditions beyond our control we strictly recommend to carry out intensive trials to test the suitability of our products with regards to the required process and applications. We do not accept any liability with regards to the above information or with regards to any verbal recommendation, except for cases where we are liable or gross negligence or falls intention.

*Conditionally recommended applications. Suggest testing on specific application to determine suitability.

•Holz-Her is the registered trademark of Karl M. Reich of Nürtingen, Germany and licensed in the United States to Holz-Her US, Inc.

Dorus is the Registered Trademark of Dorus Klebetechnik GmbH & Co. KG.

7566 Bath Road, Mississauga, Ontario L4T 1L2
350 West Armory Drive, South Holland, IL 60473

800-461-0061 or 905-673-5156
800-426-6362 or 905-673-5156

FAX: 905-673-9372
FAX: 905-673-9372

DÖLKEN
WOODTAPE

A SURTECO COMPANY